


# M06DF SERIES

# MACHINE SENSORS - BAYONET CONNECTOR w/ 90° MOUNTING

Designed for machinery (plastic injection, generators, compressors etc.) where bayonet connection is required.

Contact us for more information and options with **M06DF** Series sensors.

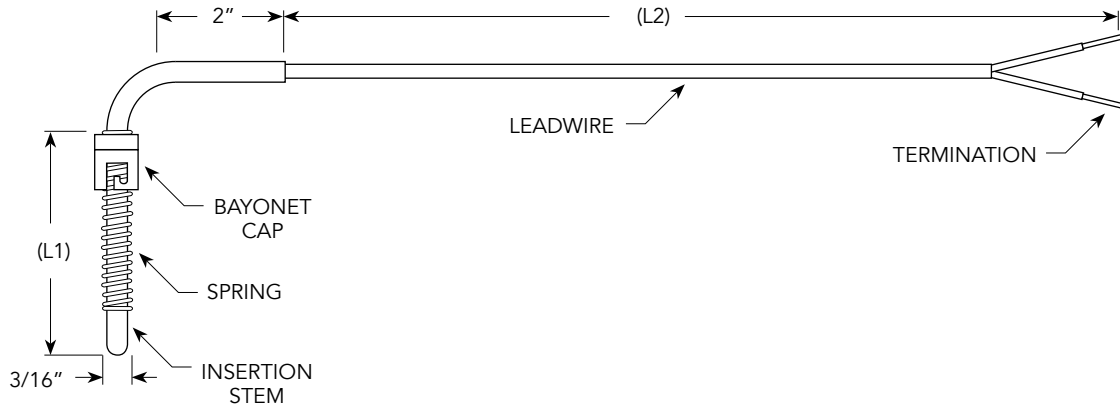

## PART NUMBER

**M06DF** - 

|   |
|---|
| 1 |
|---|

 - 

|   |
|---|
| 2 |
|---|

 - 

|   |
|---|
| 3 |
|---|

 - 

|   |
|---|
| 4 |
|---|

 - 

|   |
|---|
| 5 |
|---|

 - 

|         |
|---------|
| OPTIONS |
|---------|

| 1 SENSOR TYPE |                       |
|---------------|-----------------------|
| <b>R2</b>     | RTD Pt100 (MAX 260°C) |
| <b>R5</b>     | RTD Pt100 (MAX 500°C) |
| <b>K</b>      | TYPE K T/C            |
| <b>J</b>      | TYPE J T/C            |
| <b>T</b>      | TYPE T T/C            |
| <b>O ( )</b>  | OTHER (Specify)       |

| 2 INSERTION LENGTH (L1)  |
|--------------------------|
| SPECIFY LENGTH IN INCHES |

| 3 LEADWIRE LENGTH (L2)   |
|--------------------------|
| SPECIFY LENGTH IN INCHES |

| 4 LEADWIRE INSULATION |                    |
|-----------------------|--------------------|
| <b>P</b>              | PVC (MAX 100°C)    |
| <b>T</b>              | TEFLON (MAX 260°C) |
| <b>G</b>              | GLASS (MAX 500°C)  |
| <b>GSS</b>            | GLASS w/ SSOB      |
| <b>CF</b>             | CERAMIC FIBRE      |

| 5 LEADWIRE TERMINATION |                 |
|------------------------|-----------------|
| <b>N</b>               | BARE LEADS      |
| <b>P</b>               | MINI PLUG       |
| <b>U</b>               | STANDARD PLUG   |
| <b>J</b>               | MINI JACK       |
| <b>A</b>               | STANDARD JACK   |
| <b>O ( )</b>           | OTHER (Specify) |

| OPTIONS        |  |
|----------------|--|
| <b>U</b>       | UN-GROUNDED JUNCTION (ONLY APPLIES TO THERMOCOUPLES) |
| <b>D</b>       | DUAL SENSOR  |
| <b>A</b>       | FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE                |
| <b>2W / 4W</b> | 2-WIRE / 4 WIRE LEADWIRE (ONLY APPLIES TO RTDS)      |