


M06SF SERIES

MACHINE SENSORS - BAYONET CONNECTOR w/ FIXED SPRING

Designed for machinery (plastic injection, generators, compressors etc.) where bayonet connection is required.

Contact us for more information and options with **M06SF** Series sensors.

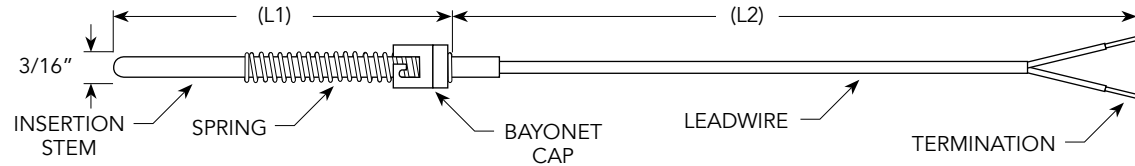

PART NUMBER

M06SF -

1

 -

2

 -

3

 -

4

 -

5

 -

OPTIONS

1 SENSOR TYPE	
R2	RTD Pt100 (MAX 260°C)
R5	RTD Pt100 (MAX 500°C)
K	TYPE K T/C
J	TYPE J T/C
T	TYPE T T/C
O ()	OTHER (Specify)

2 INSERTION LENGTH (L1)
SPECIFY LENGTH IN INCHES

3 LEADWIRE LENGTH (L2)
SPECIFY LENGTH IN INCHES

4 LEADWIRE INSULATION	
P	PVC (MAX 100°C)
T	TEFLON (MAX 260°C)
G	GLASS (MAX 500°C)
GSS	GLASS w/ SSOB
CF	CERAMIC FIBRE

5 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ()	OTHER (Specify)

OPTIONS	
U	UN-GROUNDED JUNCTION (ONLY APPLIES TO THERMOCOUPLES)
D	DUAL SENSOR
A	FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE
2W / 4W	2-WIRE / 4 WIRE LEADWIRE (ONLY APPLIES TO RTDS)