


M01A SERIES

SENSOR w/ FLEXIBLE STEM AND WALL MOUNT ENCLOSURE

Simple and versatile design. Suitable for numerous applications and available in various sensor types.

- Standard Features:
- 316 SS Submersible Insertion Stem
 - Standard (Thermocouple) Ungrounded
 - Standard (RTD Pt100) 3-Wire 385 1/3DIN

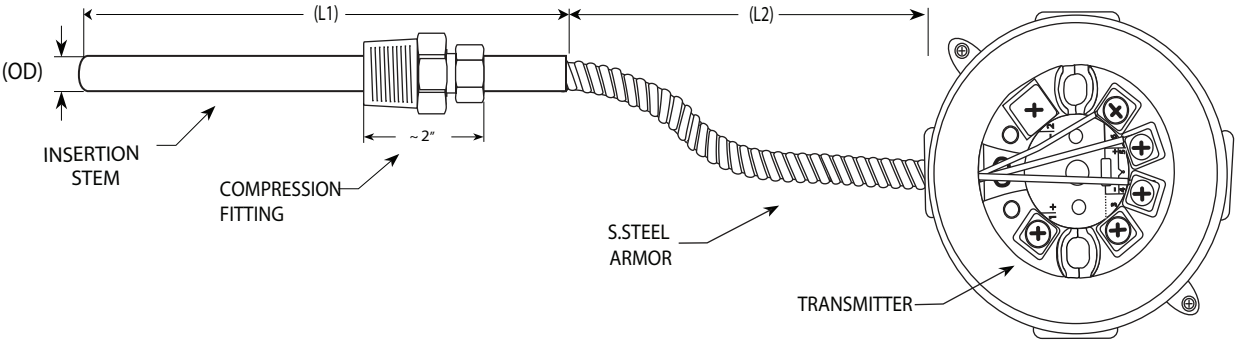

PART NUMBER

M01A -

1

 -

2

 -

3

 -

4

 -

5

 -

6

 -

OPTIONS

1 SENSOR TYPE	
R2	RTD, PT100 (max 260°C)
R5	RTD, PT100 (max 500°C)
K	CHROMEL / ALUMEL
J	COPPER / CONSTANTAN
T	IRON / CONSTANTAN
O ()	OTHER (Specify)

2 STEM DIAMETER (OD)	
B	1/8"
C	3/16"
D	1/4" (STANDARD)
E	3/8"
O ()	OTHER (Specify)

3 INSERTION LENGTH (L1)
SPECIFY DIAMETER IN INCHES

4 ARMOR LENGTH (L2)
SPECIFY LENGTH IN INCHES

5 LEADWIRE INSULATION	
P	PVC (MAX 100°C)
T	TEFLON (MAX 260°C)
TSS	TEFLON w/s.steel over-braid
G	GLASS (MAX 500°C)
GSS	GLASS w/s.steel over-braid
O ()	OTHER (Specify)

6 COMPRESSION FITTING	
CS2	1/2 NPT
CS4	1/4 NPT
CS8	1/8 NPT
O ()	OTHER (Specify)

OPTIONS	
D	DUAL SENSORS
1/10	1/10 DIN RTD
T10	4/20mA NON-ISOLATED TRANSMITTER (FOR RTD) SEE SPECS PAGE
T20	4/20mA NON-ISOLATED TRANSMITTER (FOR THERMOCOUPLE) SEE SPECS PAGE
T30	4/20mA ISOLATED TRANSMITTER SEE SPECS PAGE
O ()	OTHER (Specify)