


Designed for direct immersion, with adjustable threaded process connection and head.

Standard Features:

- 316SS stem welded to the bushing.
- RTD (Pt100) 3-wire 385 1/3DIN
- s.steel ferrule (single adjustment)

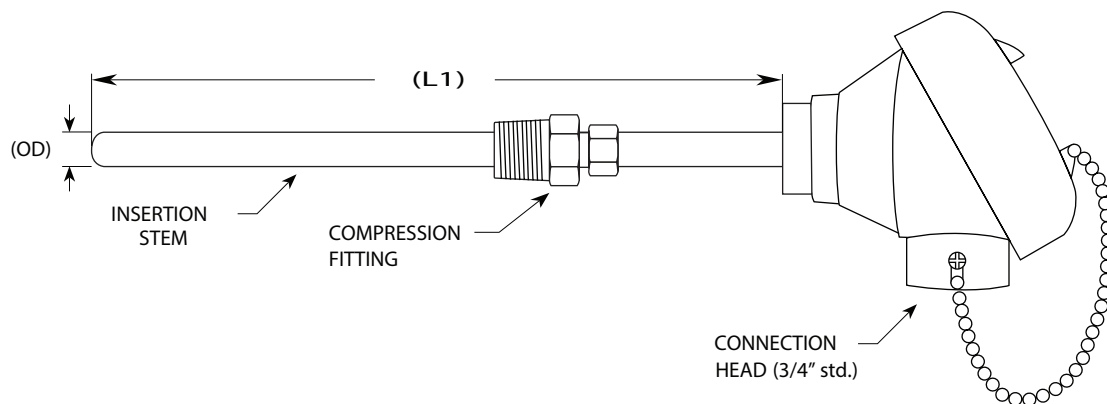

PART NUMBER

M01CS -

1	2	3	4	5
---	---	---	---	---

 -

OPTIONS

1 RTD	
R2	PT100 (max 260°C)
R5	PT100 (max 500°C)
R12	PT1000(max 260°C)
R15	PT1000(max 500°C)
O ()	OTHER (Specify)

2 STEM DIAMETER (OD)	
B	1/8"
C	3/16"
D	1/4" (STANDARD)
E	3/8"
O ()	OTHER (Specify)

3 INSERTION LENGTH (L1)
SPECIFY LENGTH IN INCHES

4 COMPRESSION FITTING	
2	1/2 NPT
4	1/4 NPT
8	1/8 NPT
O ()	OTHER (Specify)

5 CONNECTION HEAD	
G	CAST ALUMINUM (STANDARD)
F	WHITE POLYPROPYLENE (FDA)
XS	EXPLOSION PROOF (SS)
X	EXPLOSION PROOF (ALUMINUM)
S	STAINLESS STEEL
N	NO HEAD (6" LEADWIRE)
O	OTHER (Specify)

OPTIONS	
D	DUAL SENSORS
1/10	1/10 DIN RTD
T10	4/20mA NON-ISOLATED TRANSMITTER SEE SPECS PAGE
T30	4/20mA ISOLATED TRANSMITTER SEE SPECS PAGE
RTF	RE-ADJUSTABLE TEFLON FERRULE
O ()	OTHER (Specify)