


M01 SERIES

RTD w/ UNION-NIPPLE & CONNECTION HEAD

The M01 w/ union-nipple designed to allow a flexible installation in situations where the connection head needs to be kept away from the process. This is crucial when using head-mounted transmitter in high temperature applications.

Standard Features

- 316 SS Submersible Insertion Stem
- RTD (Pt100) 3-Wire 385 1/3DIN

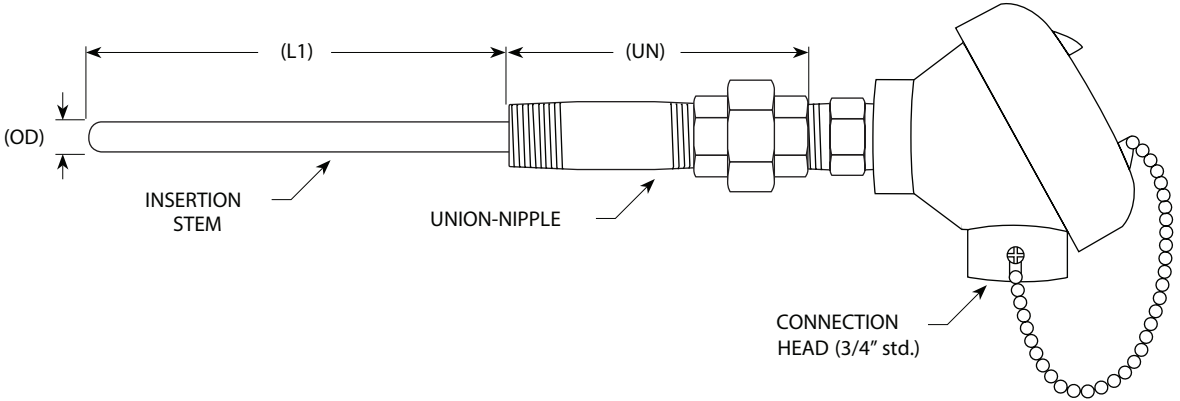

PART NUMBER

M01 -

1	2	3	4	5

 - UN

6

 - TRANSMITTER & OTHER OPTIONS

--

1 RTD	
R2	PT100 (max 260°C)
R5	PT100 (max 500°C)
R12	PT1000(max 260°C)
R15	PT1000(max 500°C)
O ()	OTHER (Specify)

2 STEM DIAMETER (OD)	
B	1/8"
C	3/16"
D	1/4" (STANDARD)
E	3/8"
F	1/2"

3 INSERTION LENGTH (L1)
SPECIFY LENGTH IN INCHES

4 INSERTION SHEATH	
F	FIXED SHEATH
S	SPRING LOADED

5 CONNECTION HEAD	
G	CAST ALUMINUM (STANDARD)
F	WHITE POLYPROPYLENE (FDA)
XS	EXPLOSION PROOF (SS)
X	EXPLOSION PROOF (ALUMINUM)
S	STAINLESS STEEL
N	NO HEAD (6" LEADWIRE)
O	OTHER (Specify)

6 UNION NIPPLE LENGTH (UN)
SPECIFY LENGTH IN INCHES

OPTIONS	
D	DUAL SENSORS
1/10	1/10 DIN RTD
T10	4/20mA NON-ISOLATED TRANSMITTER SEE SPECS PAGE
T30	4/20mA ISOLATED TRANSMITTER SEE SPECS PAGE
O ()	OTHER (Specify)