


Designed for direct immersion, threaded process connection and head.

Standard Features:
- Thermocouple Ungrounded

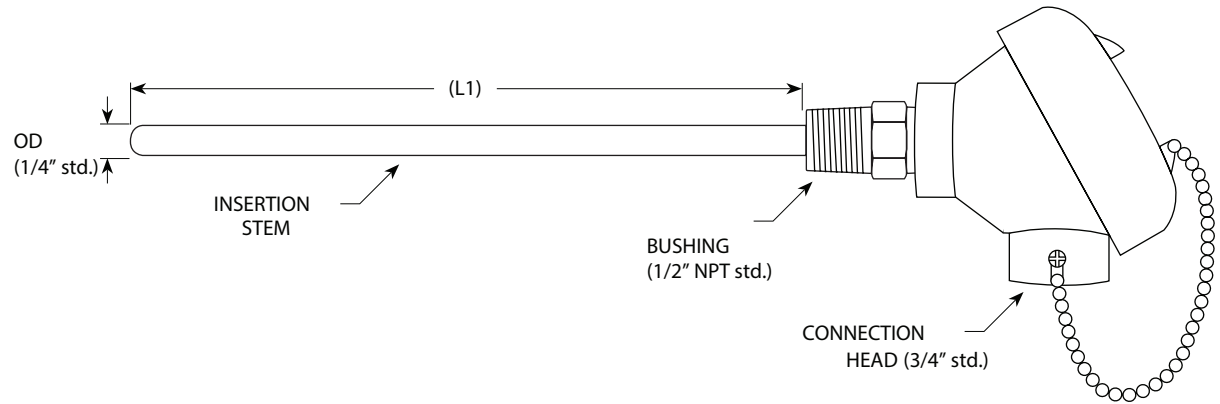

PART NUMBER

M01 -

1	2	3	4	5
---	---	---	---	---

 -

OPTIONS

1 THERMOCOUPLE TYPE	
K	CHROMEL / ALUMEL
J	IRON / CONSTANTAN
T	COPPER / CONSTANTAN
E	CHROMEL / CONSTANTAN
N	NICROSIL / NISIL
O ()	OTHER (Specify)

2 STEM DIAMETER (OD)	
B	1/8"
C	3/16"
D	1/4" (STANDARD)
E	3/8"
F	1/2"

3 INSERTION LENGTH (L1)	
SPECIFY LENGTH IN INCHES	

4 INSERTION SHEATH	
F	FIXED SHEATH
S	SPRING LOADED

5 CONNECTION HEAD	
G	CAST ALUMINUM (STANDARD)
F	WHITE POLYPROPYLENE (FDA)
XS	EXPLOSION PROOF (SS)
X	EXPLOSION PROOF (ALUMINUM)
S	STAINLESS STEEL
N	NO HEAD (6" LEADWIRE)
O	OTHER (Specify)

OPTIONS	
D	DUAL SENSORS
G	GROUNDING JUNCTION
T20	4/20mA NON-ISOLATED TRANSMITTER SEE SPECS PAGE
T30	4/20mA ISOLATED TRANSMITTER SEE SPECS PAGE
O ()	OTHER (Specify)