


M02 SERIES

TUBE & WIRE THERMOCOUPLE w/ COMPRESSION FITTING

Designed for applications where a threaded process connection is required. The compression fitting allows for sealed connection. Available in various sensor types.

Available in re-adjustable configuration. Contact us for more information and options with M02 Series sensors.

- 316 SS Compression Fitting

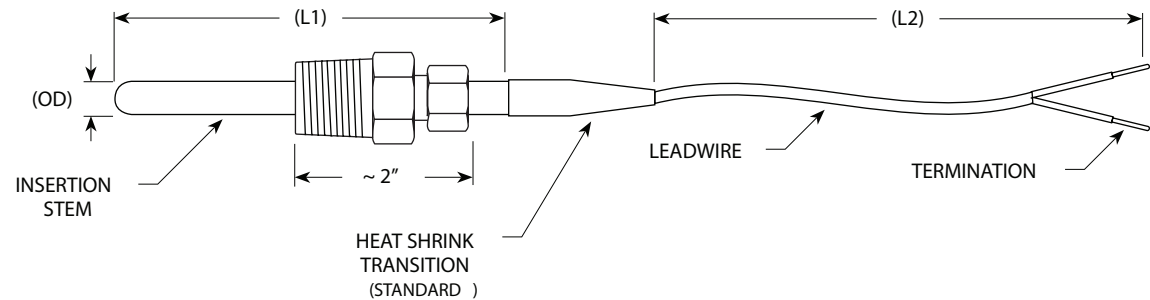

PART NUMBER

M02 -

1

 -

2

 -

3

 -

4

 -

5

 -

6

 -

7

 -

OPTIONS

1 THERMOCOUPLE TYPE		2 STEM DIAMETER (OD)		3 INSERTION LENGTH (L1)	4 LEADWIRE LENGTH (L2)	5 LEADWIRE INSULATION		6 LEADWIRE TERMINATION	
K	CHROMEL / ALUMEL	A	1/16"	SPECIFY LENGTH IN INCHES	SPECIFY LENGTH IN INCHES	P	PVC (MAX 100°C)	N	BARE LEADS
J	IRON / CONSTANTAN	B	1/8"			T	TEFLON (MAX 260°C)	P	MINI PLUG
T	COPPER / CONSTANTAN	C	3/16"			G	GLASS (MAX 500°C)	U	STANDARD PLUG
E	CHROMEL / CONSTANTAN	D	1/4" (STANDARD)			GSS	GLASS w/ SSOB	J	MINI JACK
N	NICROSIL / NISIL	E	3/8"			CF	CERAMIC FIBRE	A	STANDARD JACK
O ()	OTHER (Specify)							O ()	OTHER (Specify)

7 COMPRESSION FITTING		OPTIONS				
CS2	1/2 NPT	D	DUAL SENSOR		SUB	WATER SUBMERSIBLE TRANSITION
CS4	1/4 NPT	A	FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE		U	UN-GROUNDED JUNCTION
CS8	1/8 NPT	S	SHARP TIP		BP()	90° BENT PROBE (Specify Cold Leg Length in Inches)
O ()	OTHER (Specify)	R	TRANSITION FITTING w/ STRAIN RELIEF SPRING			
		E	EXPOSED SENSOR TIP (AIR SENSOR)			