


# M02 SERIES

# TUBE & WIRE RTD w/ COMPRESSION FITTING

Designed for applications where a threaded process connection is required. The compression fitting allows for sealed connection. Available in various sensor types.

Available in re-adjustable configuration. Contact us for more information and options with M02 Series sensors.

- 316 SS Compression Fitting

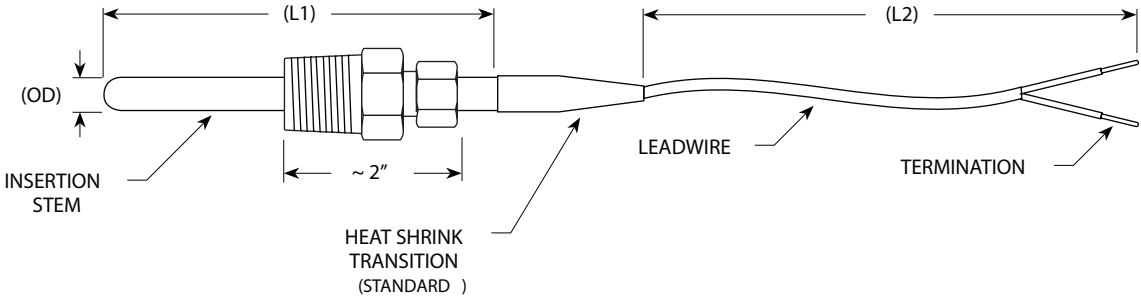

**PART NUMBER**

M02 - 

1
---

 - 

2
---

 - 

3
---

 - 

4
---

 - 

5
---

 - 

6
---

 - 

7
---

 - 

OPTIONS
---------

O ( ) OTHER

1 RTD	
R2	PT100 (max 260°C)
R5	PT100 (max 500°C)
R12	PT1000(max 260°C)
R15	PT1000(max 500°C)
O ( )	OTHER (Specify)

2 STEM DIAMETER (OD)	
A	1/16"
B	1/8"
C	3/16"
D	1/4" (STANDARD)
E	3/8"

3 INSERTION LENGTH (L1)
SPECIFY LENGTH IN INCHES

4 LEADWIRE LENGTH (L2)
SPECIFY LENGTH IN INCHES

5 LEADWIRE INSULATION	
P	PVC (MAX 100°C)
T	TEFLON (MAX 260°C)
G	GLASS (MAX 500°C)
GSS	GLASS w/ SSOB
O ( )	OTHER

6 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ( )	OTHER (Specify)

7 COMPRESSION FITTING	
CS2	1/2 NPT
CS4	1/4 NPT
CS8	1/8 NPT
O ( )	OTHER (Specify)

OPTIONS			
1/10	1/10 DIN RTD	SUB	WATER SUBMERSIBLE TRANSITION
D	DUAL SENSOR	2W / 4W	2-WIRE / 4 WIRE LEADWIRE
A	FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE	BP ( )	90° BENT PROBE (Specify Cold Leg Length in Inches)
S	SHARP TIP		
R	TRANSITION FITTING w/ STRAIN RELIEF SPRING		
E	EXPOSED SENSOR TIP (AIR SENSOR)		