

M02 SERIES


TUBE & WIRE THERMOCOUPLE

Simple and versatile design. Suitable for numerous applications and available in various sensor types.

Contact us for more information and options with M02 Series sensors.

Standard Features:

- Grounded
- 316 SS Submersible Insertion Stem

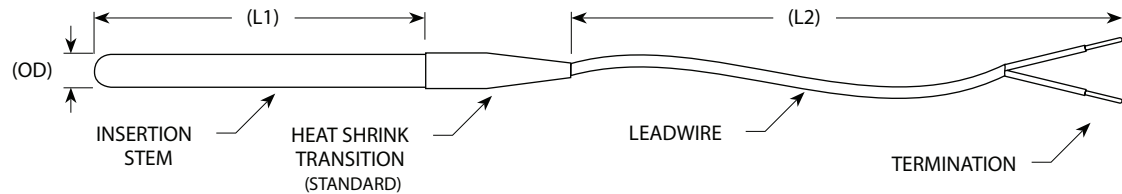

PART NUMBER

M02 -

1

 -

2

 -

3

 -

4

 -

5

 -

6

 -

OPTIONS

1 THERMOCOUPLE TYPE	
K	CHROMEL / ALUMEL
J	IRON / CONSTANTAN
T	COPPER / CONSTANTAN
E	CHROMEL / CONSTANTAN
N	NICROSIL / NISIL
O ()	OTHER (Specify)

2 STEM DIAMETER (OD)	
A	1/16"
B	1/8"
C	3/16"
D	1/4" (STANDARD)
E	3/8"

3 INSERTION LENGTH (L1)
SPECIFY LENGTH IN INCHES

4 LEADWIRE LENGTH (L2)
SPECIFY LENGTH IN INCHES

5 LEADWIRE INSULATION	
P	PVC (MAX 100°C)
T	TEFLON (MAX 260°C)
TSS	TEFLON w/s.steel over-braid
G	GLASS (MAX 500°C)
GSS	GLASS w/s.steel over-braid
CF	CERAMIC FIBRE
O ()	OTHER (Specify)

6 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ()	OTHER (Specify)

OPTIONS			
D	DUAL SENSOR	SUB	WATER SUBMERSIBLE TRANSITION
A	FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE	U	UN-GROUNDED JUNCTION
S	SHARP TIP	BP()	90° BENT PROBE (Specify Cold Leg Length in Inches)
R	TRANSITION FITTING w/ STRAIN RELIEF SPRING		
E	EXPOSED SENSOR TIP (AIR SENSOR)		