


Simple and versatile design. Suitable for numerous applications and available in various sensor types.

Contact us for more information and options with M02B Series sensors.

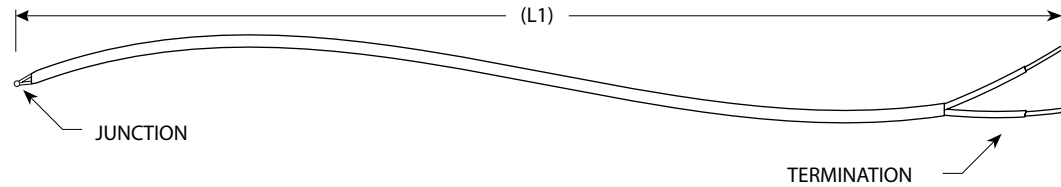

PART NUMBER

M02B	-	1	2	3	4	5	-	OPTIONS

1 SENSOR TYPE	
R2	RTD Pt100 (MAX 260°C)
R5	RTD Pt100 (MAX 500°C)
K	TYPE K T/C
J	TYPE J T/C
T	TYPE T T/C
O ()	OTHER (Specify)

2 LEADWIRE LENGTH (L1)
SPECIFY LENGTH IN INCHES

3 LEADWIRE INSULATION	
P	PVC (MAX 100°C)
T	TEFLON (MAX 260°C)
TSS	TEFLON w/s.steel over-braid
G	GLASS (MAX 500°C)
GSS	GLASS w/s.steel over-braid
CF	CERAMIC FIBRE
O ()	OTHER (Specify)

4 LEADWIRE GAUGE	
24	24 AWG
20	20 AWG
O ()	OTHER (Specify)

5 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ()	OTHER (Specify)

OPTIONS	
2W / 4W	2-WIRE / 4 WIRE LEADWIRE (ONLY APPLIES TO RTDS)
O ()	OTHER (Specify)