


M02C SERIES

BENT QUICK CONNECT SENSOR

Designed for applications where a threaded process connection is required. The compression fitting allows for sealed connection.

Contact us for more information and options with M02C Series sensors..

- 316 SS Submersible Insertion Stem
- Standard (RTD Pt100) 3-Wire 385 1/3DIN

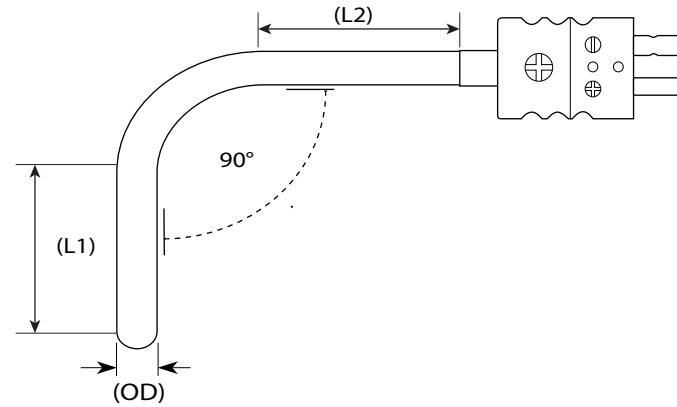

PART NUMBER

M02C90 -

| | | | |
|---|---|---|---|
| 1 | 2 | 3 | 4 |
|---|---|---|---|

 -

| | |
|---|---|
| 5 | 6 |
|---|---|

 -

| |
|---------|
| OPTIONS |
|---------|

| 1 SENSOR TYPE | | 2 STEM DIAMETER (OD) | | 3 INSERTION LENGTH (L1) | 4 COLD LEG (L2) | 5 ENGEL BEND (°) | | 6 LEADWIRE TERMINATION | |
|---------------|-------------------|----------------------|-----------------|--------------------------|--------------------------|------------------|-----------------|------------------------|-----------------|
| R2 | PT100 (max 260°C) | A | 1/16" | SPECIFY LENGTH IN INCHES | SPECIFY LENGTH IN INCHES | 90° | 90° DEGREE BEND | N | BARE LEADS |
| R5 | PT100 (max 500°C) | B | 1/8" | | | 45° | 45° DEGREE BEND | P | MINI PLUG |
| K | CHROMEL / ALUMEL | C | 3/16" | | | O () | OTHER (Specify) | U | STANDARD PLUG |
| J | IRON / CONSTANTAN | D | 1/4" (STANDARD) | | | | | J | MINI JACK |
| O () | OTHER (Specify) | E | 3/8" | | | | | A | STANDARD JACK |
| | | | | | | | | O () | OTHER (Specify) |

| OPTIONS | |
|---------|---------------------------------|
| 1/10 | 1/10 DIN RTD |
| D | DUAL SENSOR |
| S | SHARP TIP |
| E | EXPOSED SENSOR TIP (AIR SENSOR) |
| O | OTHER (Specify) |
| | |