

# M02C SERIES


# QUICK CONNECT RTD w/ COMPRESSION FITTING

Designed for applications where a threaded process connection is required. The compression fitting allows for sealed connection.

Contact us for more information and options with M02C Series sensors..

Available in re-adjustable configuration.

- 316 SS Submersible Insertion Stem
- Standard ( RTD Pt100 ) 3-Wire 385 1/3DIN
- 316 SS Compression Fitting

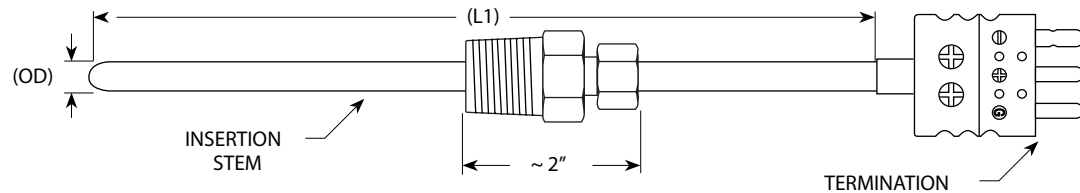

## PART NUMBER

M02C	-	1	2	3	4	-	5	-	OPTIONS

1 RTD		2 STEM DIAMETER (OD)		3 INSERTION LENGTH (L1)	4 LEADWIRE TERMINATION		5 COMPRESSION FITTING	
R2	PT100 (max 260°C)	A	1/16"	SPECIFY LENGTH IN INCHES	N	BARE LEADS	CS2	1/2 NPT
R5	PT100 (max 500°C)	B	1/8"		P	MINI PLUG	CS4	1/4 NPT
R12	PT1000(max 260°C)	C	3/16"		U	STANDARD PLUG	CS8	1/8 NPT
R15	PT1000(max 500°C)	D	1/4" (STANDARD)		J	MINI JACK	O ( )	OTHER (Specify)
O ( )	OTHER (Specify)	E	3/8"		A	STANDARD JACK		
					O ( )	OTHER (Specify)		

OPTIONS	
D	DUAL SENSOR
S	SHARP CHISEL TIP
BP ( )	90° BENT PROBE (Specify Cold Leg Length in Inches)
E	EXPOSED SENSOR TIP (AIR SENSOR)
O	OTHER (Specify)