


# M02C SERIES

# QUICK CONNECT RTD

Designed for applications where a threaded process connection is required. The compression fitting allows for sealed connection.

Contact us for more information and options with M02C Series sensors..

- 316 SS Submersible Insertion Stem
- Standard ( RTD Pt100 ) 3-Wire 385 1/3DIN

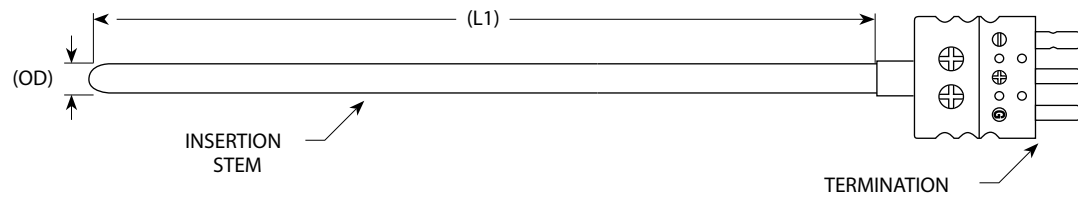

## PART NUMBER

M02C	-	1	2	3	4	-	5	-	OPTIONS
------	---	---	---	---	---	---	---	---	---------

1 RTD		2 STEM DIAMETER (OD)		3 INSERTION LENGTH (L1)	4 LEADWIRE TERMINATION	
R2	PT100 (max 260°C)	A	1/16"	SPECIFY LENGTH IN INCHES	N	BARE LEADS
R5	PT100 (max 500°C)	B	1/8"		P	MINI PLUG
R10	PT1000(max 260°C)	C	3/16"		U	STANDARD PLUG
R15	PT1000(max 500°C)	D	1/4" (STANDARD)		J	MINI JACK
O ( )	OTHER (Specify)	E	3/8"		A	STANDARD JACK
					O ( )	OTHER (Specify)

OPTIONS	
1/10	1/10 DIN RTD
D	DUAL SENSOR
S	SHARP TIP
BP ( )	90° BENT PROBE (Specify Cold Leg Length in Inches)
E	EXPOSED SENSOR TIP (AIR SENSOR)
O	OTHER (Specify)