

# M02C SERIES


# QUICK CONNECT THERMOCOUPLE w/ COMPRESSION FITTING

Designed for applications where a threaded process connection is required. The compression fitting allows for sealed connection.

Contact us for more information and options with M02C Series sensors available in re-adjustable configuration.

Standard Features:

- Standard (Thermocouple) Grounded
- 316 SS Compression Fitting

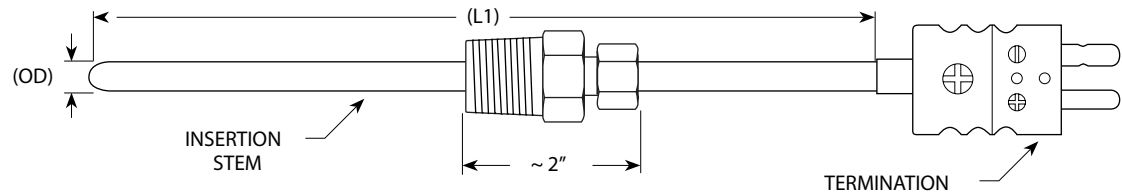

## PART NUMBER

M02C	-	1	2	3	4	-	5	-	OPTIONS
------	---	---	---	---	---	---	---	---	---------

1 THERMOCOUPLE TYPE	
K	CHROMEL / ALUMEL
J	IRON / CONSTANTAN
T	COPPER / CONSTANTAN
E	CHROMEL / CONSTANTAN
N	NICROSIL / NISIL
O ( )	OTHER (Specify)

2 STEM DIAMETER (OD)	
A	1/16"
B	1/8"
C	3/16"
D	1/4" (STANDARD)
E	3/8"

3 INSERTION LENGTH (L1)	
SPECIFY LENGTH IN INCHES	

4 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ( )	OTHER (Specify)

5 COMPRESSION FITTING	
CS2	1/2 NPT
CS4	1/4 NPT
CS8	1/8 NPT
O ( )	OTHER (Specify)

OPTIONS	
U	UN-GROUNDED JUNCTION
D	DUAL SENSOR
S	SHARP CHISEL TIP
BP ( )	90° BENT PROBE (Specify Cold Leg Length in Inches)
E	EXPOSED SENSOR TIP (AIR SENSOR)
O	OTHER (Specify)