


Simple and versatile design. Suitable for numerous applications and available in various sensor types.

Contact us for more information and options with M02B Series sensors.

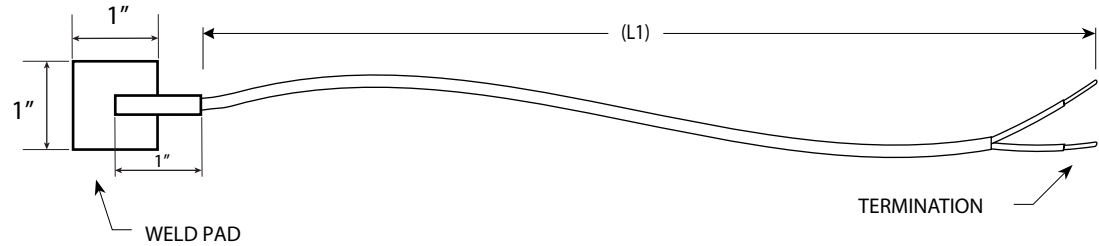

**PART NUMBER**

**M02 WP** - 

1	2	3	4	5
---	---	---	---	---

 - 

OPTIONS
---------

1 THERMOCOUPLE TYPE	
K	CHROMEL / ALUMEL
J	IRON / CONSTANTAN
T	COPPER / CONSTANTAN
E	CHROMEL / CONSTANTAN
N	NICROSIL / NISIL
O ( )	OTHER (Specify)

2 LEADWIRE LENGTH (L1)
SPECIFY LENGTH IN INCHES

3 LEADWIRE INSULATION	
T	TEFLON (MAX 260°C)
TSS	TEFLON w/s.steel over-braid
G	GLASS (MAX 500°C)
GSS	GLASS w/s.steel over-braid
CF	CERAMIC FIBRE
O ( )	OTHER (Specify)

4 LEADWIRE GAUGE	
24	24 AWG
20	20 AWG
O ( )	OTHER (Specify)

5 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ( )	OTHER (Specify)

OPTIONS	
A	A FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE
U	UN-GROUNDED JUNCTION
O ( )	OTHER (Specify)