


M02PC are made to clamp in to any pipe of any material, made easy to monitor temperature without drilling or tapping.

Standard Features:

- grounded (for thermocouple)
- 316 SS Submersible Insertion Stem
- heat shrink transition

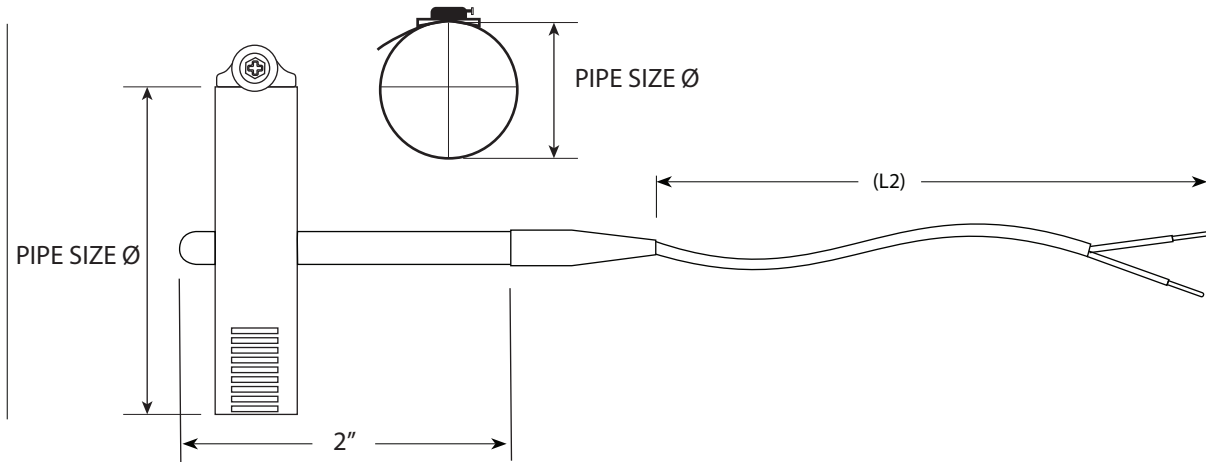

PART NUMBER

M02 -

1	2	3

 -

4	5	6

 -

OPTIONS

1 SENSOR TYPE		2 STEM DIAMETER (OD)		3 PIPE SIZE Ø		4 LEADWIRE LENGTH (L2)		3 LEADWIRE INSULATION		6 LEADWIRE TERMINATION	
R2	RTD, PT100 (max 260°C)	A	1/16"	SPECIFY DIAMETER IN INCHES		SPECIFY LENGTH IN INCHES		T	TEFLON (MAX 260°C)	N	BARE LEADS
R5	RTD, PT100 (max 500°C)	B	1/8" (Standard)					TSS	TEFLON w/s.steel over-braid	P	MINI PLUG
K	CHROMEL / ALUMEL	C	3/16"	SPECIFY DIAMETER IN INCHES		SPECIFY LENGTH IN INCHES		G	GLASS (MAX 500°C)	U	STANDARD PLUG
J	IRON / CONSTANTAN	O ()	OTHER (Specify)					GSS	GLASS w/s.steel over-braid	J	MINI JACK
T	COPPER / CONSTANTAN							O ()	OTHER (Specify)	A	STANDARD JACK
O ()	OTHER (Specify)									O ()	OTHER (Specify)

OPTIONS			
D	DUAL SENSOR	SUB	WATER SUBMERSIBLE TRANSITION
A	FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE	U	UN-GROUNDED JUNCTION
R	TRANSITION FITTING w/ STRAIN RELIEF SPRING	O ()	OTHER (Specify)