


M03SS SERIES

STAINLESS STEEL STRAIGHT HANDLE SENSOR

The Stainless Steel Straight Handle sensor is an extremely sturdy and robust model, and is completely submersible so may be washed and autoclaved.

- Standard (Thermocouple) Grounded
- Standard (RTD Pt100) 3-Wire 385 1/3DIN

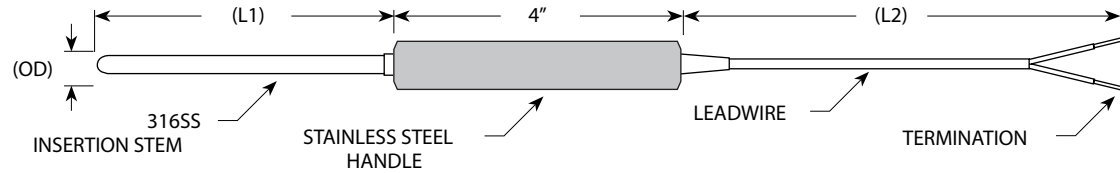

PART NUMBER

M03SS -

1

 -

2

 -

3

 -

4

 -

5

 -

6

 -

OPTIONS

1 SENSOR TYPE	
R2	RTD Pt100 (MAX 260°C)
R5	RTD Pt100 (MAX 500°C)
K	TYPE K T/C
J	TYPE J T/C
T	TYPE T T/C
O ()	OTHER (Specify)

2 STEM DIAMETER (OD)	
A	1/16"
B	1/8"
C	3/16"
D	1/4"
E	3/8"

3 INSERTION LENGTH (L1)
SPECIFY LENGTH IN INCHES

4 LEADWIRE LENGTH (L2)
SPECIFY LENGTH IN INCHES

5 LEADWIRE INSULATION	
T	TEFLON (MAX 260°C)
TSS	TEFLON w/s.steel over-braid
G	GLASS (MAX 500°C)
GSS	GLASS w/s.steel over-braid
C	COILED CHORD
O ()	OTHER (Specify)

6 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ()	OTHER (Specify)

OPTIONS	
U	UN-GROUNDED JUNCTION (ONLY APPLIES TO THERMOCOUPLES)
A	FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE
S	SHARP TIP
D	DUAL SENSORS
O ()	OTHER (Specify)