


The sanitary sensor was designed for the food, dairy and pharmaceutical industries. It is constructed of 316SS and is available in various tri-clamp configurations and sensor types.

- Standard ( RTD Pt100 ) 3-Wire 385 1/3DIN

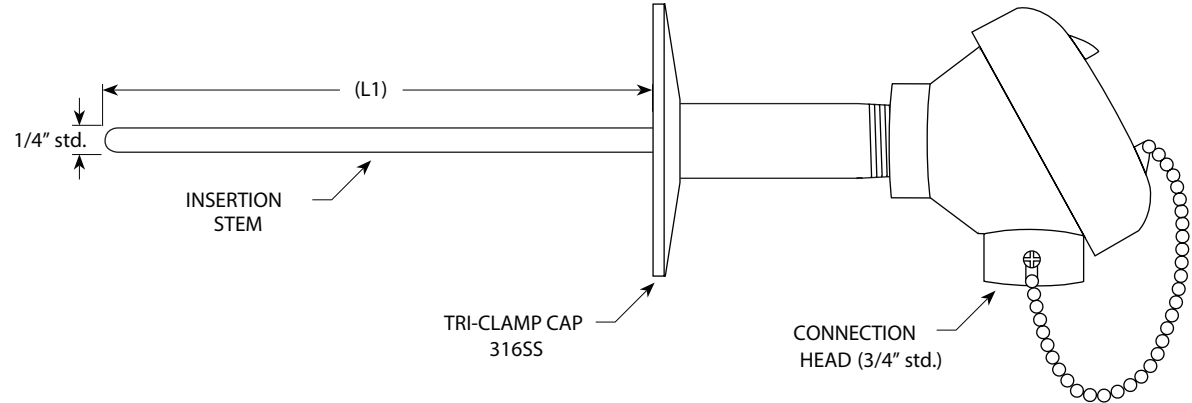

**PART NUMBER**

**M05** - 

1

 - 

2

 - 

3

 - 

4

 - 

TRANSMITTER & OTHER OPTIONS	

1 RTD	
R2	PT100 (max 260°C)
R5	PT100 (max 500°C)
R12	PT1000(max 260°C)
R15	PT1000(max 500°C)
O ( )	OTHER (Specify)

2 TRI-CLAMP CAP		
	CAP SIZE	ACTUAL SIZE
A	1.5"	1.984"
B	2"	2.516"
C	2.5"	3.047"
O ( )	OTHER (Specify)	

3 INSERTION LENGTH (L1)
SPECIFY LENGTH IN INCHES

4 CONNECTION HEAD	
G	CAST ALUMINUM
F	WHITE POLYPROPYLENE (FDA)
N	NO HEAD (6" LEADWIRE)

TRANSMITTER & OTHER OPTIONS	
D	DUAL SENSORS
1/10	1/10 DIN RTD
4W	4 WIRE
T10	4/20mA NON-ISOLATED TRANSMITTER (SPECIFY TEMPERATURE RANGE)
T30	4/20mA ISOLATED/PROGRAMMABLE TRANSMITTER