


M06SA SERIES

MACHINE SENSORS - BAYONET CONNECTOR w/ ADJUSTABLE SPRING

Designed for machinery (plastic injection, generators, compressors etc.) where bayonet connection is required.

Contact us for more information and options with M06SA Series sensors.

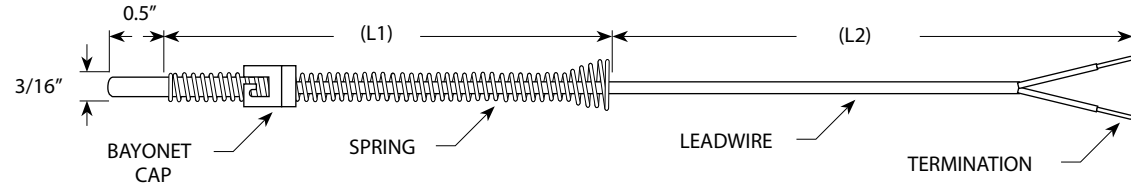

PART NUMBER

M06SA	-	1	2	-	3	4	5	-	OPTIONS

1 SENSOR TYPE	
R2	RTD, PT100 (max 260°C)
R5	RTD, PT100 (max 500°C)
K	CHROMEL / ALUMEL
J	IRON / CONSTANTAN
T	COPPER / CONSTANTAN
O ()	OTHER (Specify)

2 SPRING LENGTH (L1)
SPECIFY LENGTH IN INCHES

3 LEADWIRE LENGTH (L2)
SPECIFY LENGTH IN INCHES

4 LEADWIRE INSULATION	
P	PVC (MAX 100°C)
T	TEFLON (MAX 260°C)
G	GLASS (MAX 500°C)
GSS	GLASS w/ SSOB
CF	CERAMIC FIBRE

5 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ()	OTHER (Specify)

OPTIONS	
U	UN-GROUNDED JUNCTION (ONLY APPLIES TO THERMOCOUPLES)
D	DUAL SENSOR
2W / 4W	2-WIRE / 4 WIRE LEADWIRE (ONLY APPLIES TO RTDS)