


M06SF SERIES

MACHINE SENSORS - BAYONET CONNECTOR w/ FIXED SPRING

Designed for machinery (plastic injection, generators, compressors etc.) where bayonet connection is required.

Contact us for more information and options with M06SF Series sensors.

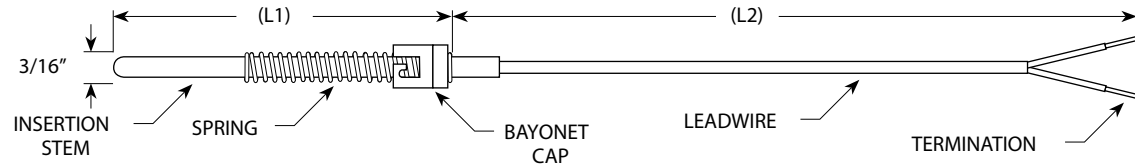

PART NUMBER

| | | | | | | | | | |
|-------|---|---|---|---|---|---|---|---|---------|
| M06SF | - | 1 | 2 | - | 3 | 4 | 5 | - | OPTIONS |
| | | | | | | | | | |

| 1 SENSOR TYPE | |
|---------------|------------------------|
| R2 | RTD, PT100 (max 260°C) |
| R5 | RTD, PT100 (max 500°C) |
| K | CHROMEL / ALUMEL |
| J | IRON / CONSTANTAN |
| T | COPPER / CONSTANTAN |
| O () | OTHER (Specify) |

| 2 INSERTION LENGTH (L1) |
|--------------------------|
| SPECIFY LENGTH IN INCHES |

| 3 LEADWIRE LENGTH (L2) |
|--------------------------|
| SPECIFY LENGTH IN INCHES |

| 4 LEADWIRE INSULATION | |
|-----------------------|--------------------|
| P | PVC (MAX 100°C) |
| T | TEFLON (MAX 260°C) |
| G | GLASS (MAX 500°C) |
| GSS | GLASS w/ SSOB |
| CF | CERAMIC FIBRE |

| 5 LEADWIRE TERMINATION | |
|------------------------|-----------------|
| N | BARE LEADS |
| P | MINI PLUG |
| U | STANDARD PLUG |
| J | MINI JACK |
| A | STANDARD JACK |
| O () | OTHER (Specify) |

| OPTIONS | |
|---------|--|
| U | UN-GROUNDED JUNCTION (ONLY APPLIES TO THERMOCOUPLES) |
| D | DUAL SENSOR |
| A | FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE |
| 2W / 4W | 2-WIRE / 4 WIRE LEADWIRE (ONLY APPLIES TO RTDS) |