


Simple and versatile design. Suitable for numerous applications and available in various sensor types.

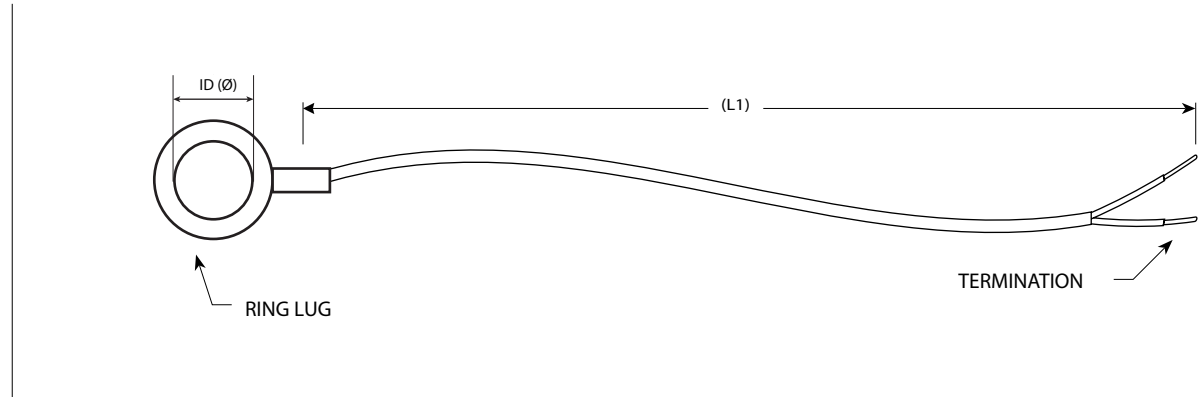

PART NUMBER

M02LR -

1	2	3	4	5
---	---	---	---	---

 -

OPTIONS

1 SENSOR TYPE	
R2	PT100 (MAX 260°C)
R5	PT100 (MAX 260°C)
K	CHROMEL / ALUMEL
J	IRON / CONSTANTAN
T	COPPER / CONSTANTAN
O ()	OTHER (Specify)

2 LEADWIRE LENGTH (L1)
SPECIFY LENGTH IN INCHES

3 LEADWIRE INSULATION	
T	TEFLON (MAX 260°C)
TSS	TEFLON w/s.steel over-braid
G	GLASS (MAX 500°C)
GSS	GLASS w/s.steel over-braid
CF	CERAMIC FIBRE
O ()	OTHER (Specify)

4 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ()	OTHER (Specify)

5 STUD SIZE (RING ID)	
LR(3/16)	3/16"
LR(1/4)	1/4"
LR ()	OTHER (Specify)

OPTIONS	
A	A FLEXIBLE SS HOSE ARMOUR OVER LEADWIRE
U	UN-GROUNDED JUNCTION
O ()	OTHER (Specify)