


Simple and versatile design. Suitable for numerous applications and available in various sensor types.

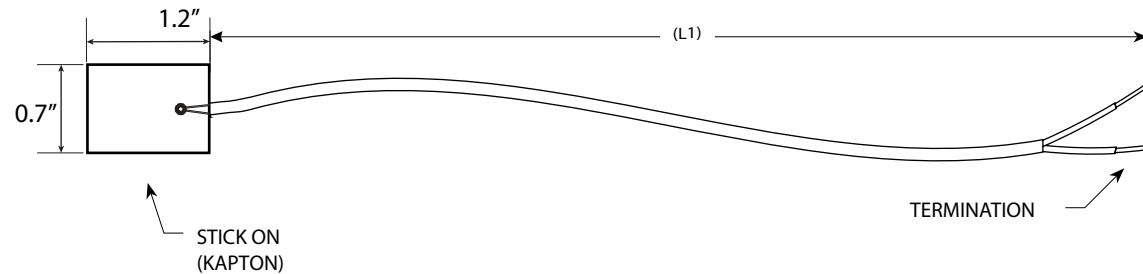

PART NUMBER

M02SO	1	2	3	4	5
-------	---	---	---	---	---

1 SENSOR TYPE	
R2	PT100 (MAX 260°C)
R5	PT100 (MAX 260°C)
K	CHROMEL / ALUMEL
J	IRON / CONSTANTAN
T	COPPER / CONSTANTAN
O ()	OTHER (Specify)

2 LEADWIRE LENGTH (L1)
SPECIFY LENGTH IN INCHES

3 LEADWIRE INSULATION	
P	PVC (MAX 100°C)
T	TEFLON (MAX 260°C)
O ()	OTHER (Specify)

4 LEADWIRE GAUGE	
24	24 AWG
20	20 AWG
O ()	OTHER (Specify)

5 LEADWIRE TERMINATION	
N	BARE LEADS
P	MINI PLUG
U	STANDARD PLUG
J	MINI JACK
A	STANDARD JACK
O ()	OTHER (Specify)